



**AMCOL Corporation**

Proven technology, refined over decades.

# 921 DS CANT RUST

Water Displacing Corrosion Preventative

## PRODUCT DESCRIPTION

The 921 DS CANT RUST Series of oil-carried, liquid corrosion inhibitors protects fabricated steel profiles in transit and indoor storage. A light coating of this product evenly wets out on the part to prevent rust, staining, and corrosion.

Three different versions are available:

**921 DS 1MS - Short term coating where a light residue is preferred.**

**921 DS 1MO - Medium term coating that is effective for most applications.**

**921 DS LTS - Maximum rust protection in warehouse storage.**

## ADVANTAGES:

- **Excellent Corrosion Prevention**
- **Easily Removed for Painting and Plating**
- **No Solvent Carrier**
- **Residual Film Stays Soft and Oily**
- **May Be Spray Applied**

## COMMON APPLICATIONS:

- **Welded Tubes**
- **Cold-rolled Steel Profiles**
- **Metal Stampings**
- **Fabricated Steel Parts**




**AMCOL Corporation**

Proven technology, refined over decades.

# 921 DS CANT RUST

Water Displacing Corrosion Preventative

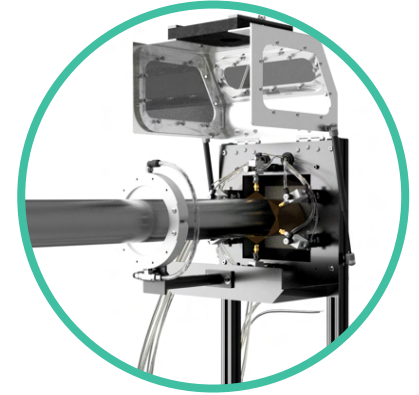

## METHOD OF APPLICATION AND CLEANING

The 921 DS CANT RUST storage coatings are most often spray applied to steel profiles using automated spray equipment. AMCOL's Model 3200S In-line Spray Applicator is designed for use on tube mills to ensure a consistent coating of tubes coming off the machine. Coatings can also be applied by manual spray wand or immersion methods.

One gallon of CANT RUST covers up to 10,000 ft<sup>2</sup> of steel with a light coating. For long term storage protection, a heavier coating of 3,000 ft<sup>2</sup> per gallon is recommended.

### Cleaning:

All of the 921 DS CANT RUST Series are easily removed using acid or alkaline detergent cleaners, mineral spirits, or vapor degrease.

## TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

**Physical State:** Liquid at 25 deg C

**Odor and Appearance:** Brown liquid with a petroleum odor

**Solubility (in water):** Insoluble

**Specific Gravity:** 0.80-0.90

**pH:** n/a

**Viscosity:** 1-50 centipoise at 25 deg C

**Special Precautions:** None



**AMCOL Corporation**  
21435 Dequindre  
Hazel Park, MI 48030  
248-414-5700  
fx. 248-414-7489  
[www.amcolcorp.com](http://www.amcolcorp.com)  
PS02.921.PB (R3)  
Approved for Use  
LSB: AA0014  
LSD: 05/04/2023