



**AMCOL Corporation**

Lubrication Technologies for Aluminum Extruders




**Why 3049 and BL 463 2S  
for Shear Lubrication?**

**Repeatable  
and Reliable**

Manual lubrication is inconsistent  
and often inadequate.

**Improve Safety**

Eliminate employees reaching inside  
of press guarding to apply lubricant  
or release a stuck butt.

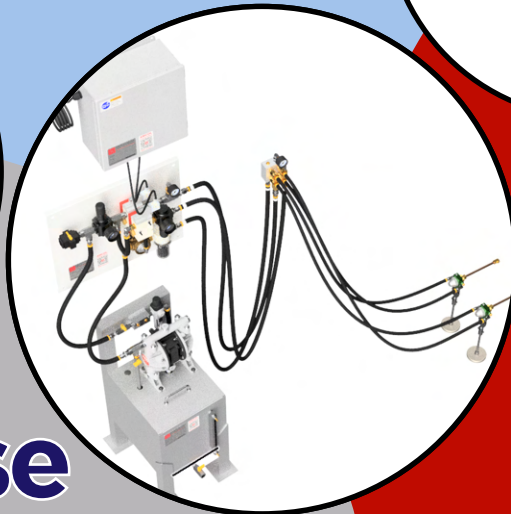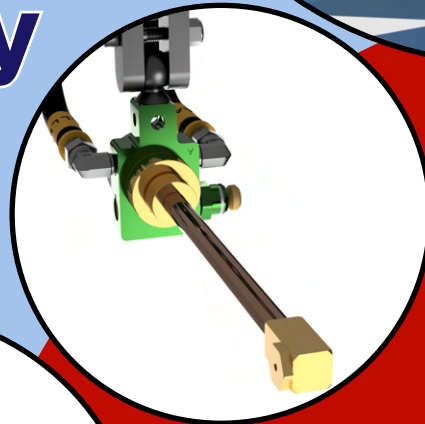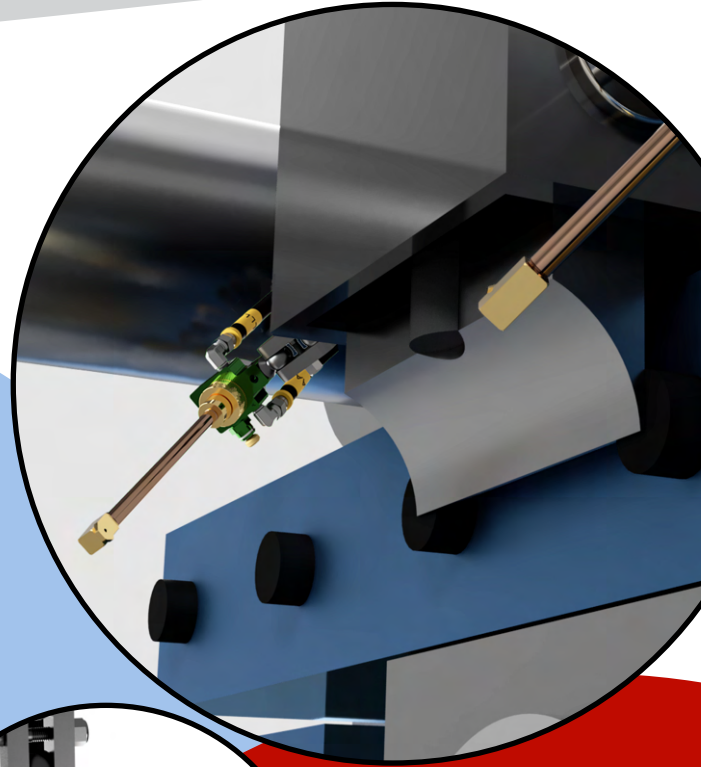

**Increase  
Production**

Maximize uptime by eliminating  
stuck butts and reducing time  
spent lubricating.

***“Manual  
Shear  
Lubrication  
Costs Time  
and Money”***

248-414-5700


[amcolcorp.com](http://amcolcorp.com)

[info@amcolcorp.com](mailto:info@amcolcorp.com)




## 3049 and BL 463 2S for Shear Lubrication

# 3049 Lubrication System for Hot Shearing of Aluminum



### Built to Last

- Stainless Steel Reservoir
- Fire Resistant Hoses
- Robust Nozzles



### Integrated PLC

- No Programming Required
- Only Requires One Signal From the Machine
- Easily Adjustable Settings



### Refined Design

- Engineered Specifically for Shearing Hot Aluminum
- Plug and Play
- Easy to Troubleshoot

### Formulated for Billet Shearing

- Evenly Coats Hot Tooling
- Works for Log or Butt Shear
- Ideal for Automatic Application



### Excellent Release Chemistry

- Low In-Use Cost
- Diluted with Water
- Repeatable Performance



### No Smoke or Flame

- Enhances Air Quality
- Eliminates Fire Hazard
- Improves Work Place Safety



# BL 463 2S EJECTEZE Lubricant for Hot Shearing of Aluminum